



WEET Technology Company Limited

FAST RECOVERY RECTIFIER

R1A THRU R1M


VOLTAGE RANGE 50 to 1000 Volts
CURRENT 1.0 Ampere

FEATURES

- Fast recovery glass passivated chip:46mil
- Low forward voltage drop
- Low leakage current
- High forward surge capability
- High temperature soldering:
260°C/10S at terminals
- Component in accordance to
ROHS 2002/95/1 and WEEE 2002/96/EC

MECHANICAL DATA

- Case: JEDEC SOD-123FL mold plastic
Body over glass passivated chip
- Terminals:Solder plated, solderable per
J-STD-002B and JESD22-B102D
- Polarity: Laser band denote cathode band

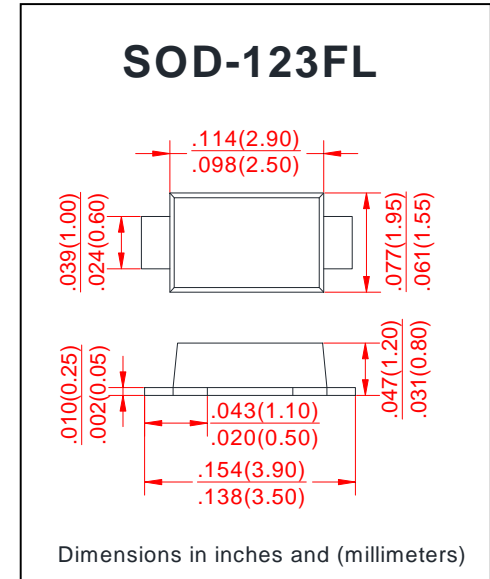

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	R1A	R1B	R1D	R1G	R1J	R1K	R1M	UNITS	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts	
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts	
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts	
Maximum Average Forward Rectified Current	$I_{(AV)}$	1.0							Amps	
Peak Forward Surge Current 8.3mS single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	30							Amps	
Maximum Instantaneous Forward Voltage at 1.0A	V_F	1.3							Volts	
Maximum DC Reverse Current at Rated DC Blocking Voltage	$T_A = 25^\circ C$	I_R							5.0	μA
	$T_A = 125^\circ C$								50	
Maximum Reverse Recovery Time(NOTE1)	T_{RR}	150				250	500		nS	
Typical Junction Capacitance (NOTE2)	C_J	15							pF	
Typical Thermal Resistance (NOTE 3)	$R_{\theta JA}$	60							$^\circ C/W$	
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to +150							$^\circ C$	

Notes:

- 1.Reverse Recovery Test Conditions:If=0.5A,Ir=1.0A,Irr=0.25A.
- 2.Measured at 1.0MHz and applied reverse voltage of 4.0 Volts.
- 3.Thermal Resistance from Junction to Ambient at. $5.0 \times 5.0mm^2$ copper pad areas.

Note: Specifications are subject to change without notice. For more detail and update, please visit our website.



WEET Technology Company Limited

FAST RECOVERY RECTIFIER

R1A THRU R1M

VOLTAGE RANGE 50 to 1000 Volts
CURRENT 1.0 Ampere

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

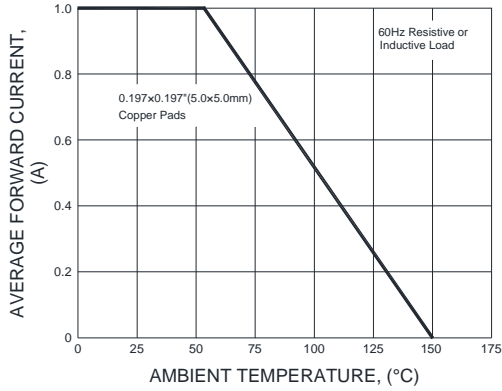


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

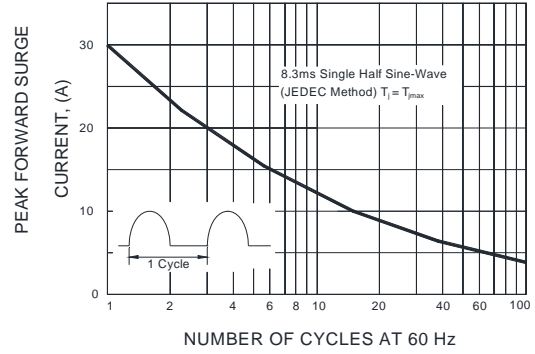


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

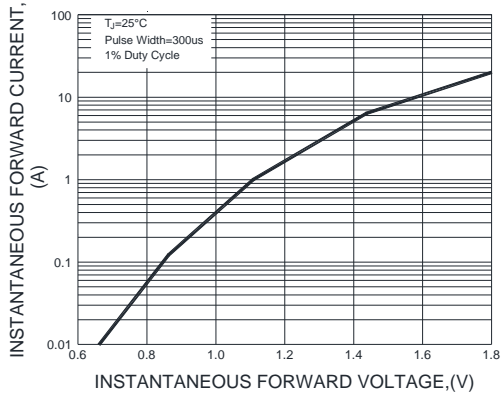


FIG.4-TYPICAL REVERSE CHARACTERISTICS


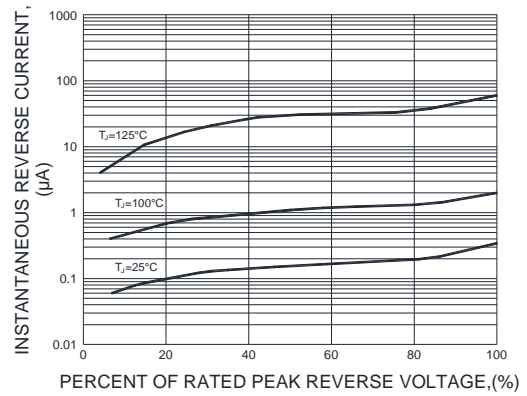


FIG.5-TYPICAL JUNCTION CAPACITANCE

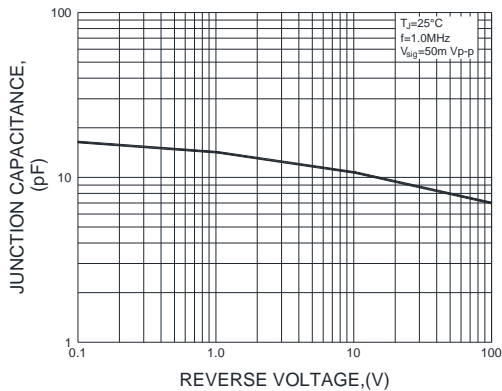

Note: Specifications are subject to change without notice. For more detail and update, please visit our website.