



# WEET Technology Company Limited

## FAST RECOVERY RECTIFIER

**FS1A THFU RS1M**

**VOLTAGE RANGE** 50 to 1000 Volts


**CURRENT** 1.0 Ampere

### FEATURES

- Plastic package has underwrites laboratory flammability Classification 94V-0
- Low profile surface mount package
- Built-in strain relief
- Fast switching for high efficiency
- Glass passivated chip junction
- High temperature soldering  
250°C/10 second at terminals

### MECHANICAL DATA

- Case: JEDED DO-214AC molded plastic over glass passivated chip
- Terminals: Solder plated, solderable per MIL-STD-750, method 2026
- Polarity: Color band denotes cathode end

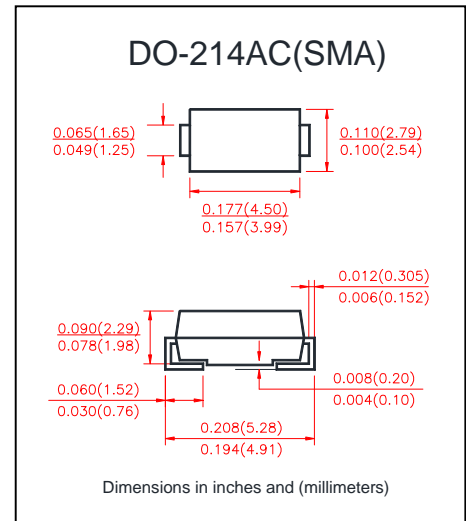

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified

### MAXIMUM RATINGS & THERMAL CHARACTERISTICS

	SYMBOLS	FS1A	FS1B	FS1D	FS1G	FS1J	FS1K	FS1M	
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current $T_L=90^\circ\text{C}$	$I_{F(AV)}$	1.0							Amps
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC method) $T_L=90^\circ\text{C}$	$I_{FSM}$	30							Amps
Typical Thermal Resistance (Note 1)	$R_{\theta JA}$	105							°C/W
	$R_{\theta JL}$	32							
Operating junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to +150							°C

### ELECTRICAL CHARACTERISTICS

	SYMBOLS	FS1A	FS1B	FS1D	FS1G	FS1J	FS1K	FS1M	
Maximum Instantaneous Forward Voltage at 1.0A	$V_F$	1.30							Volts
Maximum DC Reverse Current at rated DC Blocking Voltage	$T_A = 25^\circ\text{C}$	5.0							µA
	$T_A = 125^\circ\text{C}$	50							
Typical Reverse Recovery Time at $I_F=0.5A, I_R=1.0A, I_{RR}=0.25A$	$t_{rr}$	150				250	500	ns	
Typical junction capacitance at 4.0V, 1MHz	$C_j$	30					7.0	pF	

#### Notes:

1. Thermal resistance from Junction to ambient and from junction to lead mounted on P.C.B. with 0.2×0.2" (5.0 × 5.0mm) copper pad areas.



# WEET Technology Company Limited

## FAST RECOVERY RECTIFIER

FS1A THRU FS1M

VOLTAGE RANGE 50 to 1000 Volts  
CURRENT 1.0 Ampere

### RATINGS AND CHARACTERISTIC CURVES

FIG.1-FORWARD CURRENT DERATING CURVE

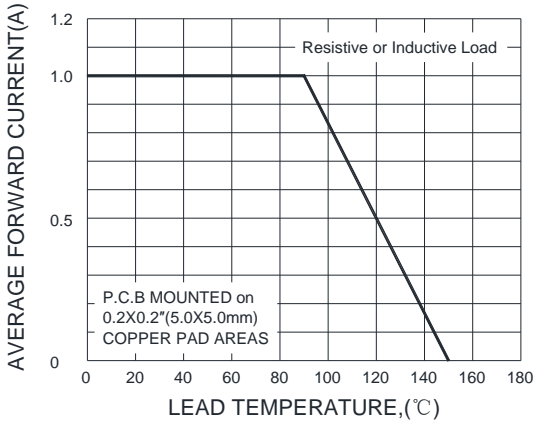


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

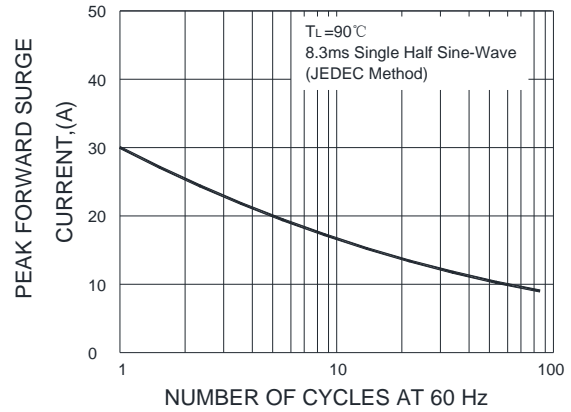


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

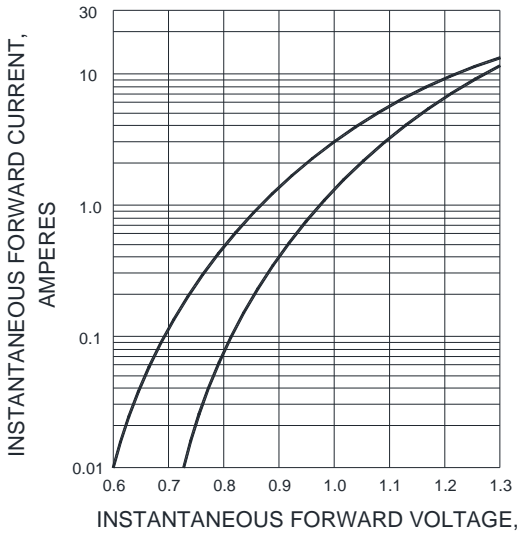


FIG.4-TYPICAL REVERSE CHARACTERISTICS

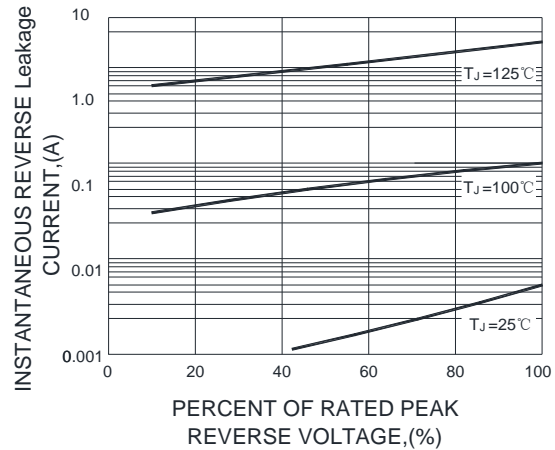


FIG.5-TYPICAL JUNCTION CAPACITANCE


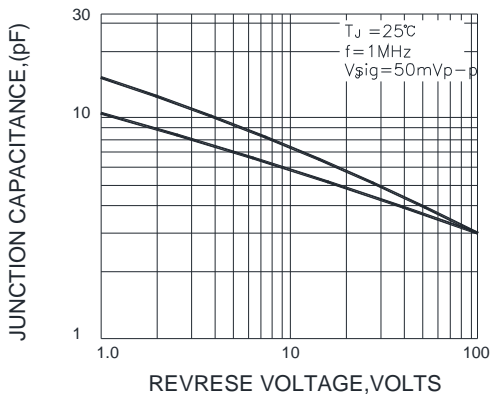


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

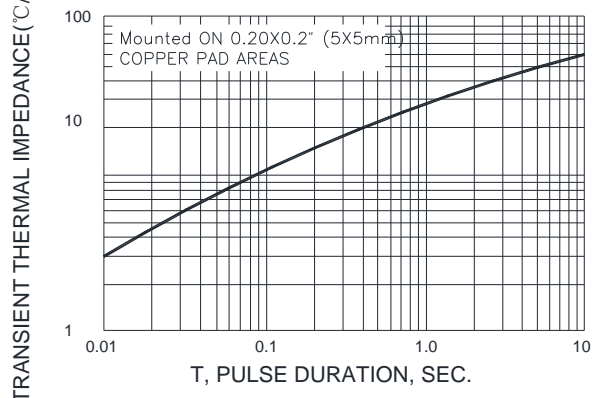

Note: Specifications are subject to change without notice. For more detail and update, please visit our website.